




DeLaval tip tank T80/T80XL

Product information

DeLaval tip tank T80/T80XL ensures a high capacity of water supply for animals. The unit is very easy to clean and to maintain. The polyethylene construction ensures livestock safety as there are no metal corners to injure them.

Advantages

- Constructed with impact resistant durable polyethylene.
- Installed with heavy-duty hot dipped galvanized universal bracket system allowing the unit to be floor or wall mounted. Mounting brackets integrated into molded outer rim for added cleanliness.
- Built in heavy-duty hot dipped galvanized tubular frame encased within radiused rim for maximum strength and durability.
- Quick release stainless steel hatch cover for ease of maintenance and access to the valve.
- Float and valve system is located at the center back of the tank giving the livestock optimum accessibility to the water from three sides.
- The rounded smooth basin won't collect dirt or manure in corners, making T80/T80XL easy to clean and maintain as well as it will reduce the risk of animals being hurt.
- High capacity valve delivers water very fast.

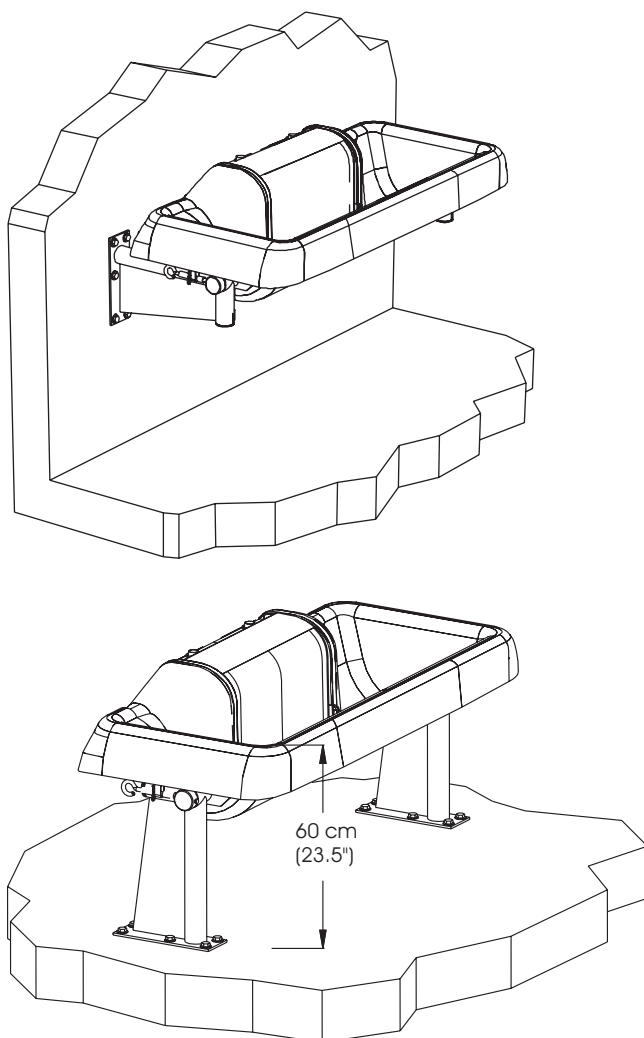



DeLaval tip tank T80/T80XL

Product information

Technical data

T80 92632984

Length mm/Inch	Width mm/Inch	Height mm/Inch	Weight kg/lbs	Drinking height	Capacity litres/ US Gallons	Max usage Dairy cows	Max usage Beef cows
1470/58	610/24	610/24	45,4/100	530/21	80/21	40	75

Valve capacity 87 l/min (At 4 bar water pressure).

Water pipe 1/2".

T80XL 92632992

Length mm/Inch	Width mm/Inch	Height mm/Inch	Weight kg/lbs	Drinking height	Capacity litres/ US Gallons	Max usage Dairy cows	Max usage Beef cows
2360/93	610/24	610/24	63,5/140	530/21	152/40	70	135

Valve capacity 87 l/min (At 4 bar water pressure).

Water pipe 1/2".